



Design

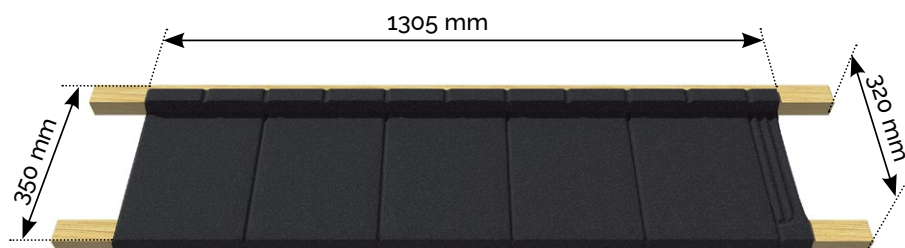

Overall Length	1305 mm
Length of Cover	1260 mm
Overall Width	350 mm
Width of Cover	320 mm
Minimum pitch	15° (27 %)
Maximum pitch	90°
Roof Cover	0.405 m²
Tiles per m²	2.47
Weight/panel	3.18 kg
Weight/area	7.85 kg/m²

Material structure

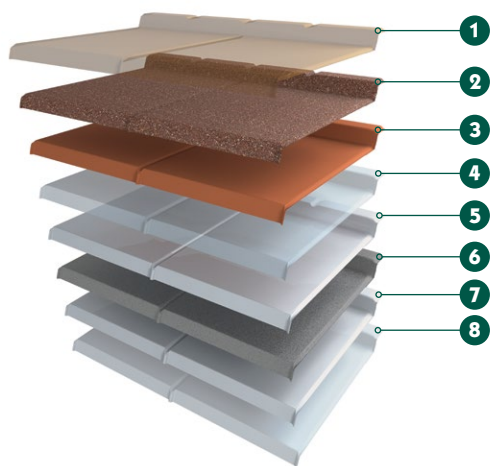

- 1 Transparent protection layer
- 2 Stone granules
- 3 Basecoat
- 4 Transparent Acrylic Coating
- 5 Aluminium-Zinc alloy
- 6 Steel
- 7 Aluminium-Zinc alloy
- 8 Transparent Acrylic Coating

Textured surface

Stone chip granules are applied to provide an attractive textured finish which at the same time enhance resistance to UV radiation. Granules are coated with lightfast heat resistant pigments.

Coating specification

Transparent protection layer: Clear 100% acrylic resin coating for granule binding and a semi-gloss finish. It helps enhance the appearance as well as increase the resistance to physical damage.

Stone Chip: Carefully selected granules provide excellent surface coverage and attractive natural looking and lasting colours.

Basecoat: A tough opaque coating based on acrylic resin. It bonds the stone chips and protects the underlying layer from water and UV radiation. It has good UV resistance and retains its flexibility although it does become harder after the first few weeks.

Polyurethane primer: The primer is applied by a coil coating process, this coating provides increased corrosion protection and a surface for superior adhesion of the basecoat that is applied.

Polyester Backer Coating: This coating provides increased durability to the underside of the tiles.

Steel specification

The Metrotile Qube Quartz tile is made of Aluminium-Zinc alloy coated steel. The grade of steel used is designed to allow forming without cracking or significant elastic recovery and at the same time to be rigid enough to tolerate reasonable loads without excessive deformation.

Steel Thickness	0.60 mm
Steel Grade	S280GD
	G300
Aluminium-Zinc Coating Mass	150 g/m²
Aluminium-Zinc Coating Grade	AZ150

Colours



Coal Black